

General Description

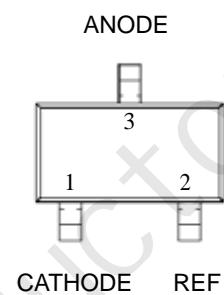
The TL431 series ICs are three-terminal adjustable shunt regulators with guaranteed thermal stability over a full operation range. These ICs feature sharp turn-on characteristics, low temperature coefficient and low output impedance, which make them ideal substitutes for Zener diodes in applications such as switching power supply, charger and other adjustable regulators.

The output voltage of these ICs can be set to any value between V_{REF} (2.5V) and the maximum cathode voltage (36V).

The TL431 precision reference is offered in two voltage tolerance: 0.5% and 1.0%.

These ICs are available in SOT-23 package.

N Package
(SOT-23)



Features

- Programmable Precise Output Voltage from 2.5V to 36V
- High Stability under Capacitive Load
- Low Temperature Deviation: 4.5mV Typical
- Low Equivalent Full-range Temperature Coefficient with 20PPM/ $^{\circ}\text{C}$ Typical
- Low Dynamic Output Resistance: 0.15 Ω Typical
- Sink Current Capacity from 1mA to 100mA
- Low Output Noise
- Wide Operating Range of -40 to 125 $^{\circ}\text{C}$

Applications

- Charger
- Voltage Adapter
- Switching Power Supply
- Graphic Card
- Precision Voltage Reference

Functional Block Diagram

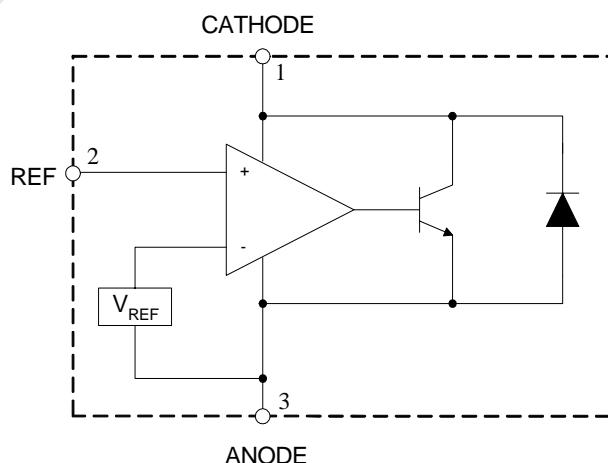


Figure 3. Functional Block Diagram of TL431

| Package | Temperature Range | Voltage Tolerance | Part Number |
|---------|-------------------|-------------------|-------------|
| SOT-23 | -40 to 125°C | 0.5% | TL431BIDBVR |
| | | 1.0% | TL431AIDBVR |

Absolute Maximum Ratings (Note 1)

| Parameter | Symbol | Value | Unit |
|------------------------------------|-----------|-------------|------|
| Cathode Voltage | V_{KA} | 40 | V |
| Cathode Current Range (Continuous) | I_{KA} | -100 to 150 | mA |
| Reference Input Current Range | I_{REF} | 10 | mA |
| Power Dissipation | P_D | 370 | mW |
| Junction Temperature | T_J | 150 | °C |
| Storage Temperature Range | T_{STG} | -65 to 150 | °C |
| ESD (Human Body Model) | ESD | 2000 | V |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

| Parameter | Symbol | Min | Max | Unit |
|-------------------------------------|----------|-----------|-----|------|
| Cathode Voltage | V_{KA} | V_{REF} | 36 | V |
| Cathode Current | I_{KA} | 1.0 | 100 | mA |
| Operating Ambient Temperature Range | | -40 | 125 | °C |

Electrical Characteristics

Operating Conditions: $T_A=25^\circ\text{C}$, unless otherwise specified.

| Parameter | | Test Circuit | Symbol | Conditions | | Min | Typ | Max | Unit |
|---|------|--------------------------|--|--|--|-------|-------|-------|---------------|
| Reference Voltage | 0.5% | 4 | V_{REF} | $V_{\text{KA}}=V_{\text{REF}}, I_{\text{KA}}=10\text{mA}$ | | 2.487 | 2.500 | 2.512 | V |
| | 1.0% | | | | | 2.475 | 2.500 | 2.525 | |
| Deviation of Reference Voltage Over Full Temperature Range | | 4 | ΔV_{REF} | $V_{\text{KA}}=V_{\text{REF}}$ $I_{\text{KA}}=10\text{mA}$ | 0 to 70°C | | 4.5 | 8 | mV |
| | | | | | -40 to 85°C | | 4.5 | 10 | |
| | | | | | -40 to 125°C | | 4.5 | 16 | |
| Ratio of Change in Reference Voltage to the Change in Cathode Voltage | | 5 | $\frac{\Delta V_{\text{REF}}}{\Delta V_{\text{KA}}}$ | $I_{\text{KA}}=10\text{mA}$ | $\Delta V_{\text{KA}}=10\text{V to } V_{\text{REF}}$ | | -1.0 | -2.7 | mV/V |
| | | | | | $\Delta V_{\text{KA}}=36\text{V to } 10\text{V}$ | | -0.5 | -2.0 | |
| Reference Current | 5 | I_{REF} | | $I_{\text{KA}}=10\text{mA}, R_1=10\text{K}\Omega, R_2=\infty$ | | | 0.7 | 4 | μA |
| Deviation of Reference Current Over Full Temperature Range | 5 | ΔI_{REF} | | $I_{\text{KA}}=10\text{mA}, R_1=10\text{K}\Omega$ $R_2=\infty, T_A=-40 \text{ to } 125^\circ\text{C}$ | | | 0.4 | 1.2 | μA |
| Minimum Cathode Current for Regulation | 4 | I_{KA} (Min) | | $V_{\text{KA}}=V_{\text{REF}}$ | | | 0.4 | 1.0 | mA |
| Off-state Cathode Current | 6 | I_{KA} (Off) | | $V_{\text{KA}}=36\text{V}, V_{\text{REF}}=0$ | | | 0.05 | 1.0 | μA |
| Dynamic Impedance | 4 | Z_{KA} | | $V_{\text{KA}}=V_{\text{REF}}, I_{\text{KA}}=1 \text{ to } 100\text{mA},$ $f \leq 1.0\text{kHz}$ | | | 0.15 | 0.5 | Ω |

Electrical Characteristics (Continued)

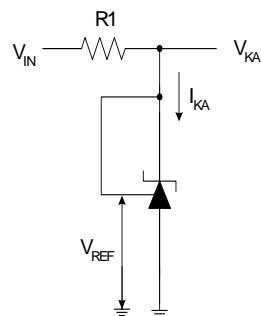


Figure 4. Test Circuit 4 for $V_{KA}=V_{REF}$

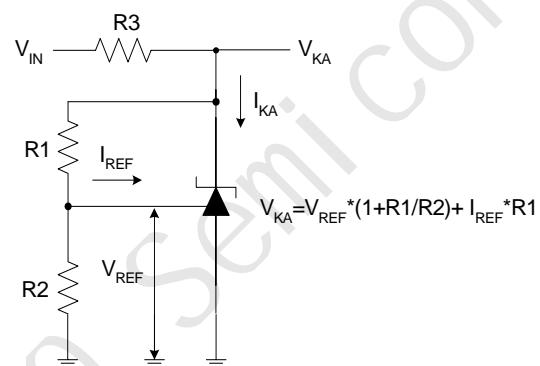


Figure 5. Test Circuit 5 for $V_{KA}>V_{REF}$

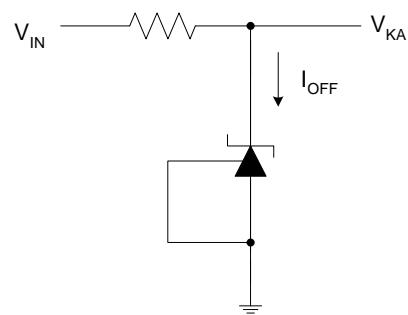


Figure 6. Test Circuit 6 for I_{OFF}

Typical Performance Characteristics

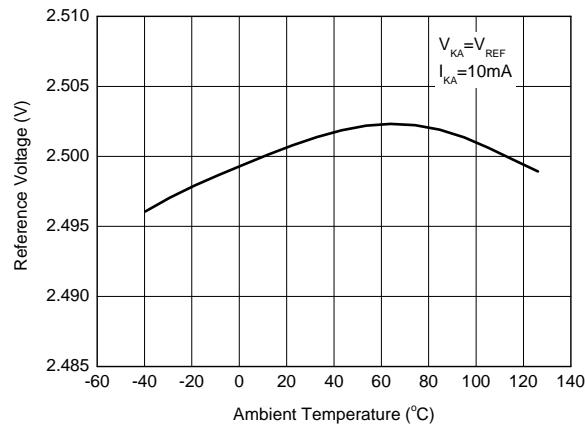


Figure 7. Reference Voltage vs. Ambient Temperature

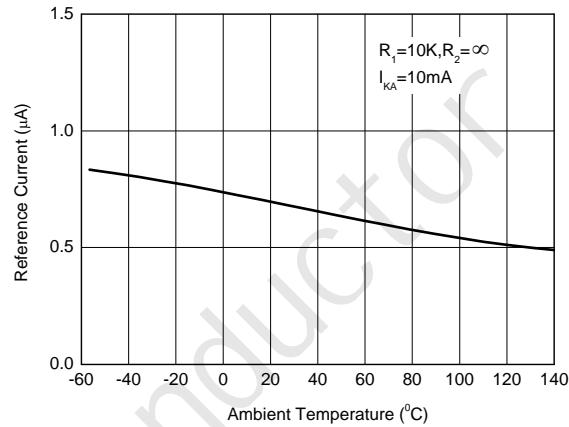


Figure 8. Reference Current vs. Ambient Temperature

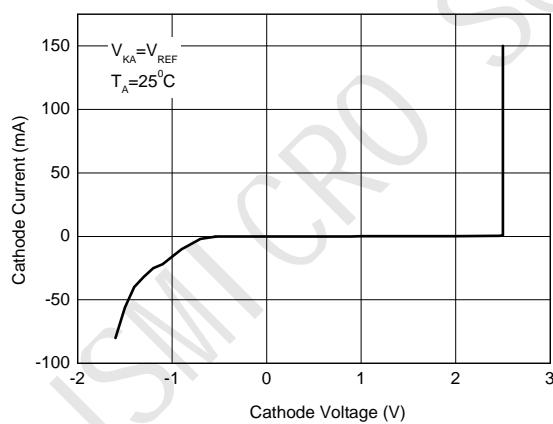


Figure 9. Cathode Current vs. Cathode Voltage

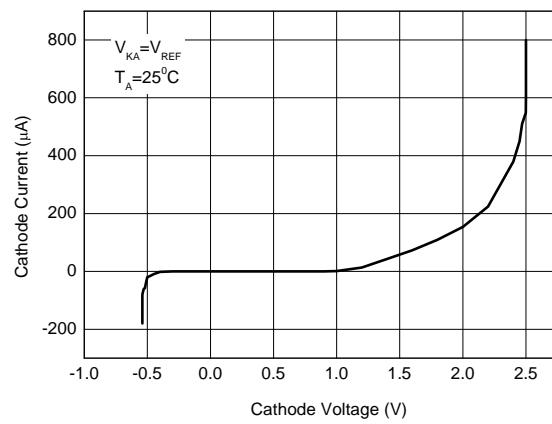


Figure 10. Cathode Current vs. Cathode Voltage

Typical Performance Characteristics (Continued)

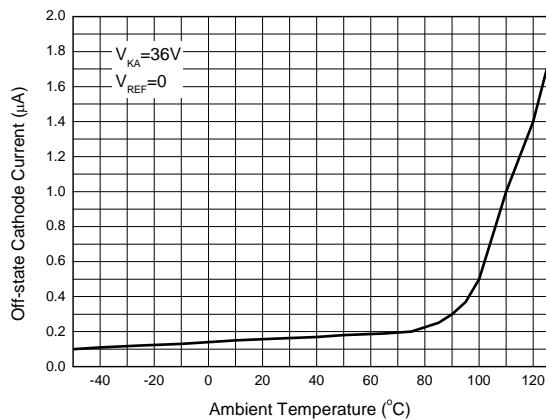


Figure 11. Off-state Cathode Current vs.
Ambient Temperature

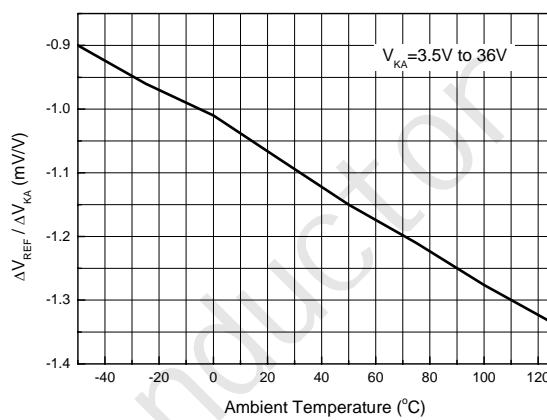


Figure 12. Ratio of Delta Reference Voltage to the
Ratio of Delta Cathode Voltage


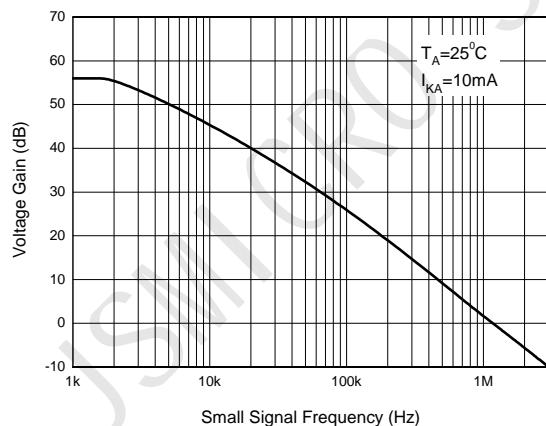


Figure 13. Small Signal Voltage Gain vs. Frequency

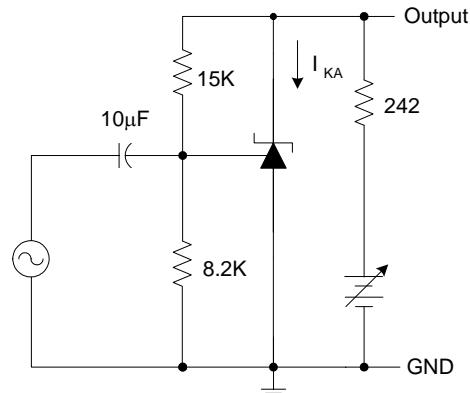

Typical Performance Characteristics (Continued)

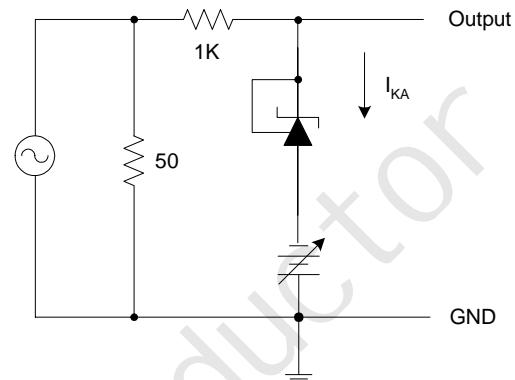
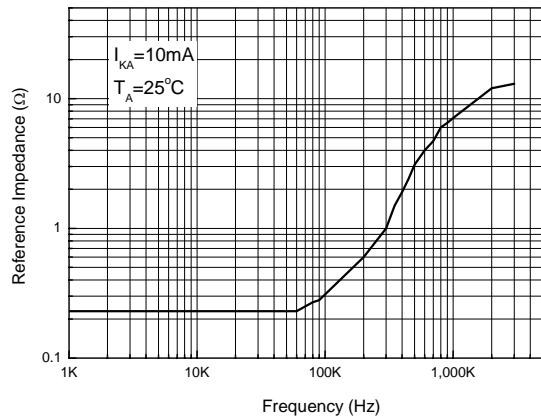


Figure 14. Reference Impedance vs. Frequency

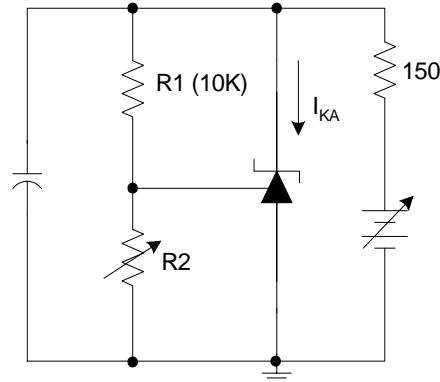
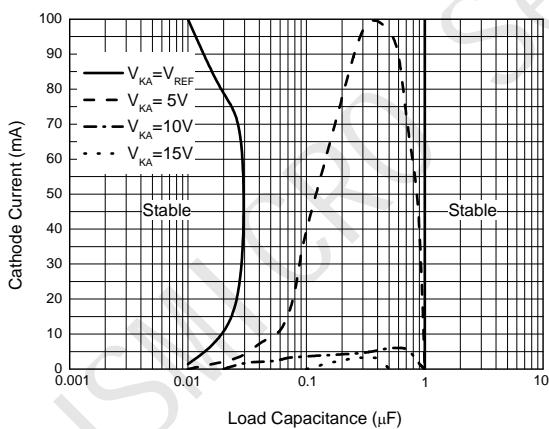


Figure 15. Stability Boundary Conditions vs. Load Capacitance

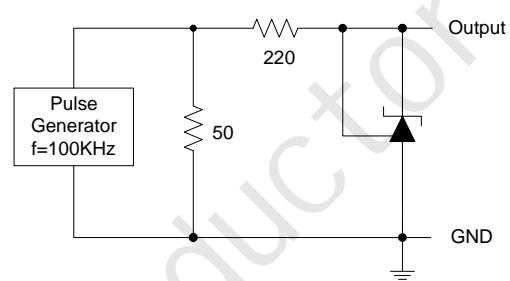
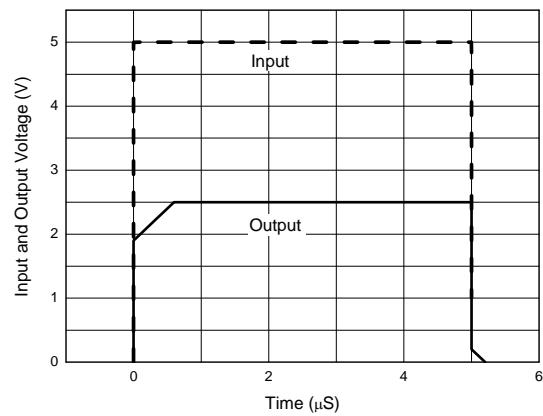
Typical Performance Characteristics (Continued)

Figure 16. Pulse Response of Input and Output Voltage

Typical Application

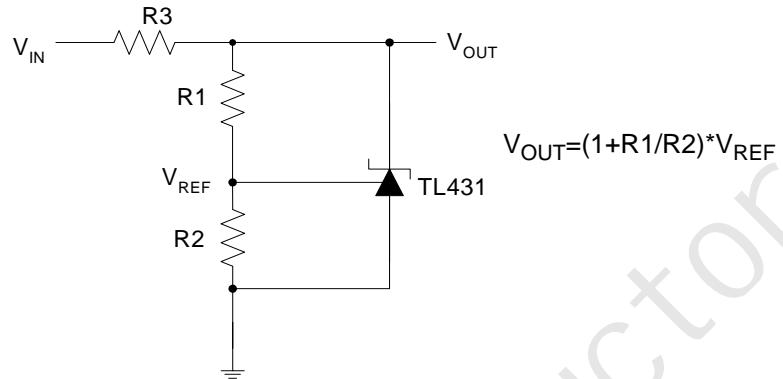


Figure 17. Shunt Regulator

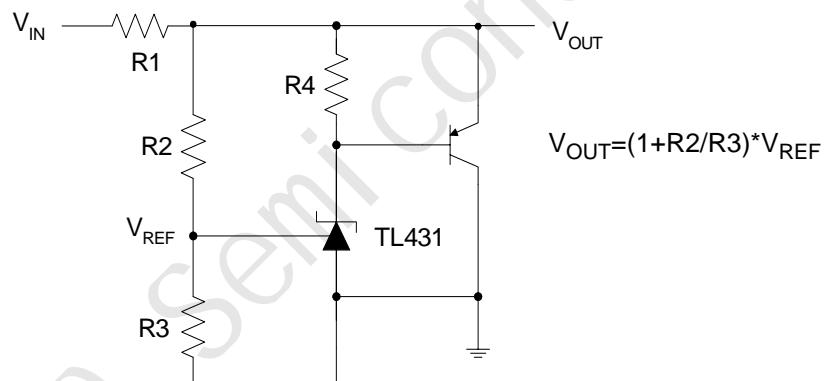


Figure 18. High Current Shunt Regulator

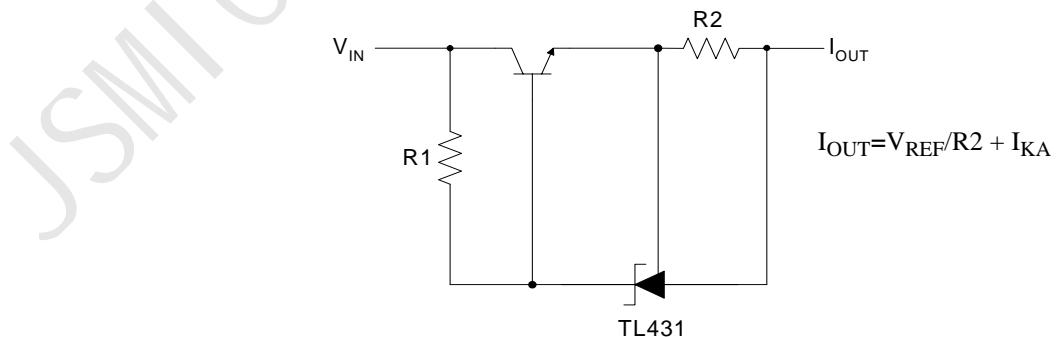


Figure 19. Current Source or Current Limit

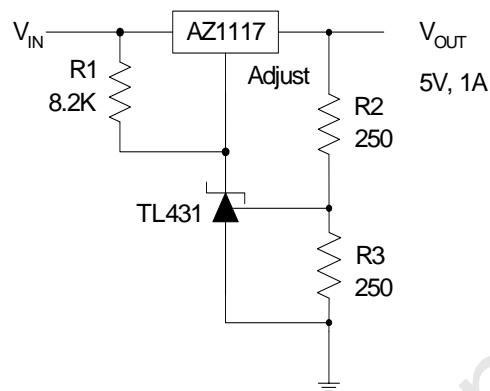
Typical Application (Continued)


Figure 20. Precision 5V 1A Regulator

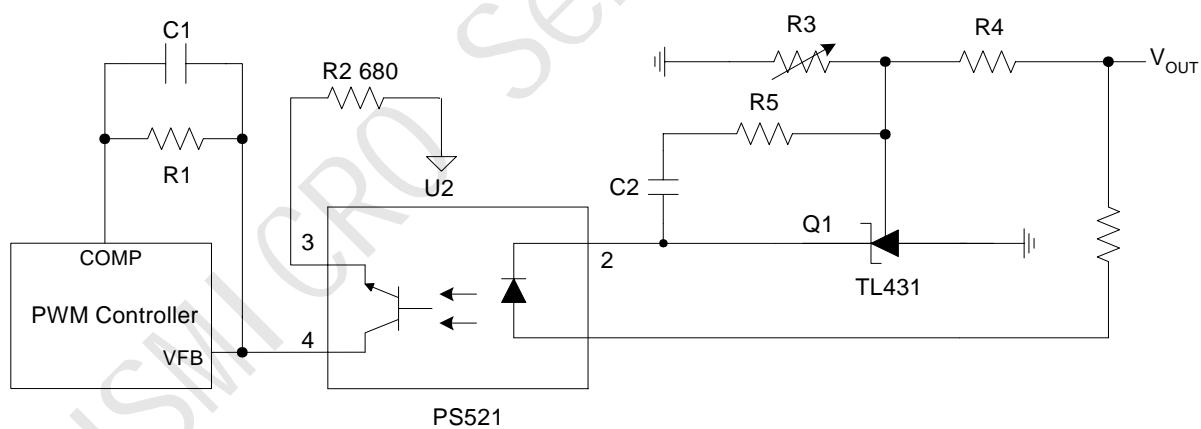


Figure 21. PWM Converter with Reference

Mechanical Dimensions
SOT-23
Unit: mm(inch)
